



FILTOMAT
M100/ MG

Self-cleaning
screen filter


MASTERS OF FILTRATION




Any Crop



Anywhere

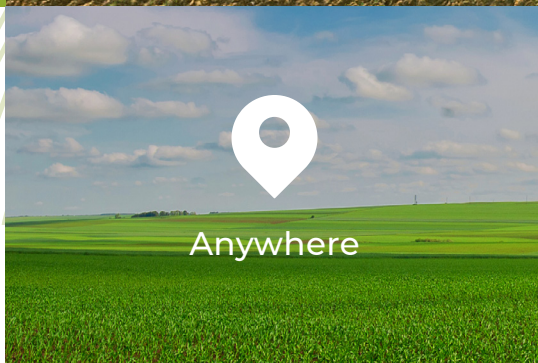

Any Water Source

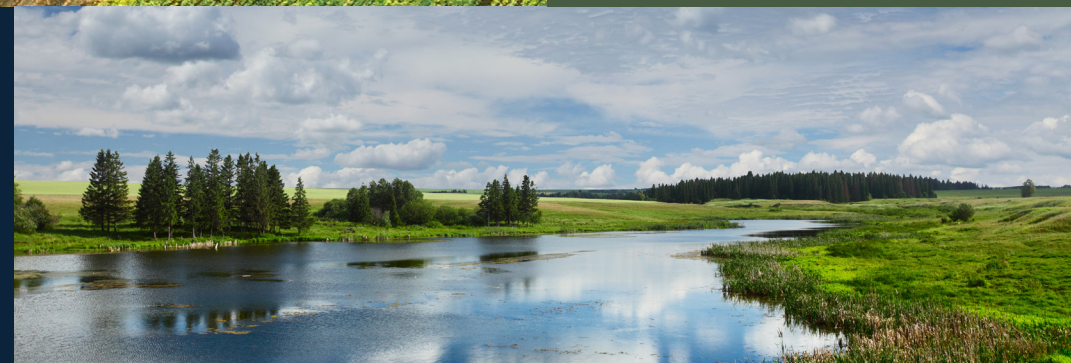

Any Technology



**Farming is
our heritage.**
**Filtration is our
legacy.**

At Amiad, our roots are in the land. As farmers, we learned at firsthand what our crops need to thrive. We understand that every water source is different, and how water quality can greatly affect crop yield.

The filter is the first vital link in the irrigation chain. It's there to protect irrigation systems from damage, while delivering the best quality water.

We develop filters that are able to cope with any water quality, in any geographical location.

We've spent years mastering filtration technology so we can offer a wide range of filters for every farmer's needs including screen, disc or media technology. Our fully automated filtration systems save time, manpower and costs.



Disc
Technology



Screen
Technology



Media
Technology

We consider every challenge as an opportunity to work side by side with our customers to solve their problems. We'll go anywhere to ensure our filters perform as expected, 24/7, every day of the year.

When you want a high performance filter for your irrigation system, consult with Amiad. We focus on doing what we do best.

Amiad. Masters of Filtration.

The Filtration Process



FILTOMAT FEATURES



Simple construction



Reliable and durable



Easy maintenance - disassembles in only 5 parts



Automatic flushing according to pressure differential or set time



Specifically designed for agricultural filtration needs





No interruption of downstream flow during flushing



FILTOMAT:

An Inside Look

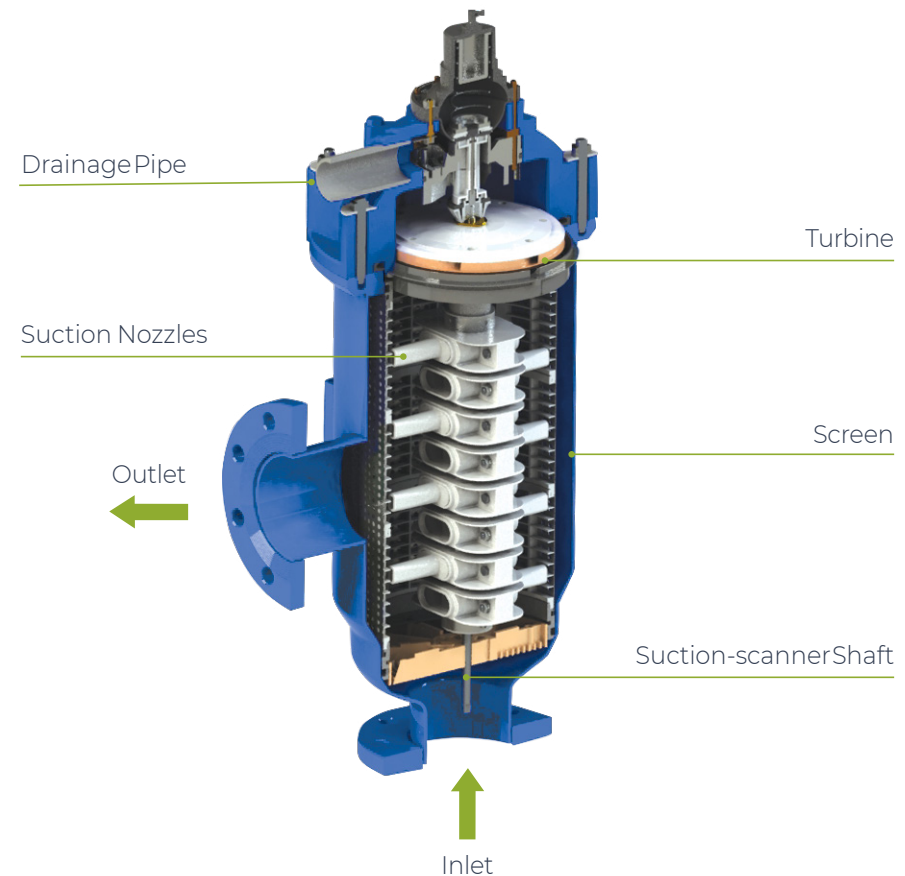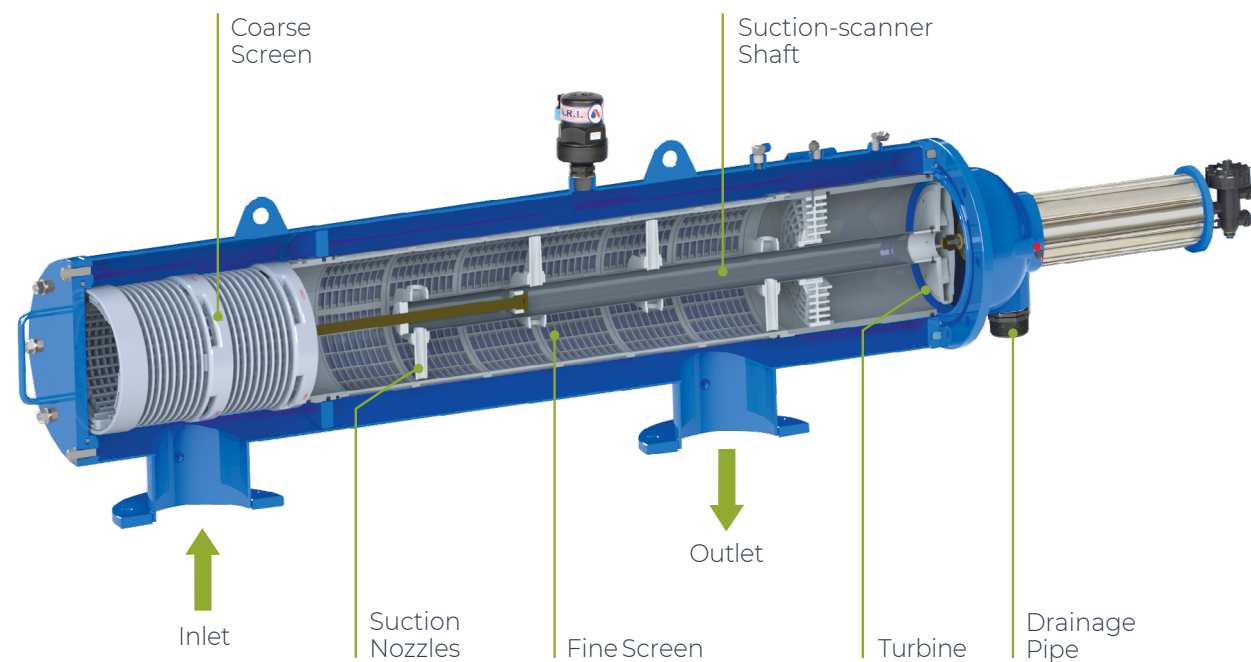

Filtomat M100 Models

Available as a stand alone or as filter bank assembly, with a single ADI-P electronic control system.

M102C/M103C: ≤ 176 gpm (40 m³/h)

M103CL/M104C: ≤ 350 gpm (80 m³/h)

M104CL: ≤ 440 gpm (100 m³/h)

M104LPN/M106LP: ≤ 793 gpm (180 m³/h)

M104XLP/M106XLP/M108LP/M110P: ≤ 1,760 gpm (400 m³/h)



Filtomat MG Models

Modular configuration, available as a stand alone or as filter bank assembly, with a single ADI-P electronic control system.

Delivered fully assembled and requiring a single connection to the inlet, outlet and drain.


MG110 (2 x 108LP): ≤ 1,760 gpm (400 m³/h)

MG112 (3 x 108LP): ≤ 2,640 gpm (600 m³/h)

MG114 (4 x 108LP): ≤ 3,520 gpm (800 m³/h)



ADI-P: the control is in your hands

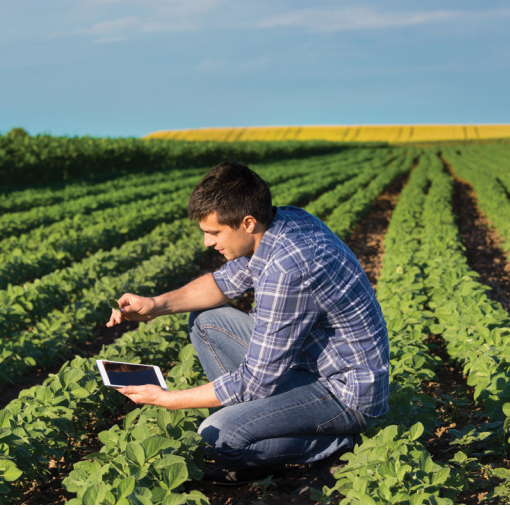

The ADI-P Controller

The ADI-P Controller operates the automated processes that flush your Filtomat filters, allowing you to control and monitor them easily and conveniently.



Suitable for low pressure (1.5-10 bar)



Single or dual solenoid configuration



Provides detailed filtration performance data



Communication within **Bluetooth®** technology range




Offline information storage available

The ADI-P App

Access your site's filtration performance data directly from the adi-p app. Here are some of the data that you can access via the adi-p app:


- Flush logs
- Flush frequency
- Current DP
- Current outlet and inlet pressure
- Flush quality - measuring DP on the filter before and after flush cycle
- Malfunctions with descriptions of each event
- Battery status and low battery alerts

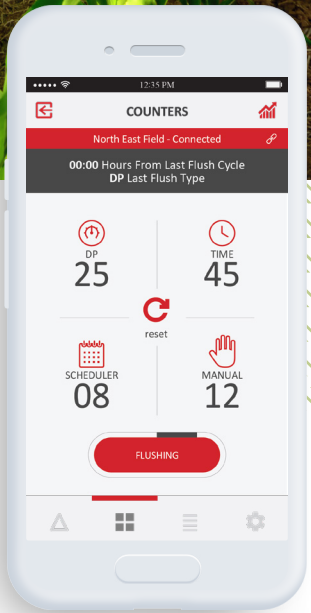


M100 Models

M102C / M103C



Typical Dimensional Drawing
inch (mm)

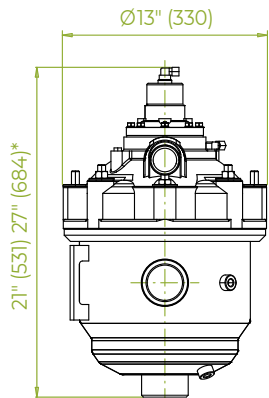



Head Loss Graph (in clean water)

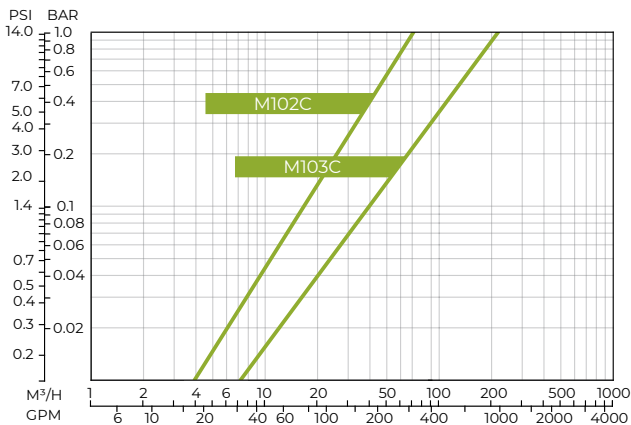

M103CL / M104C

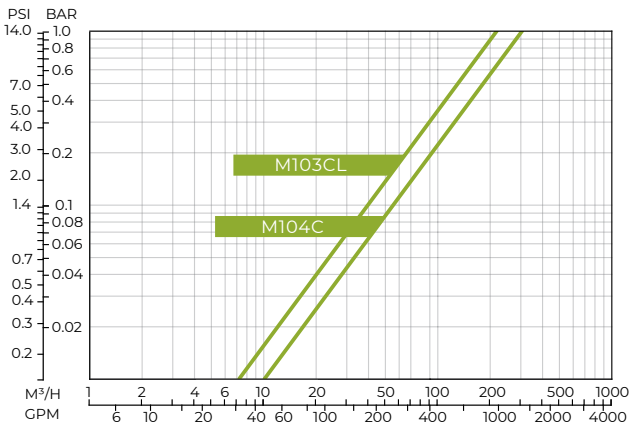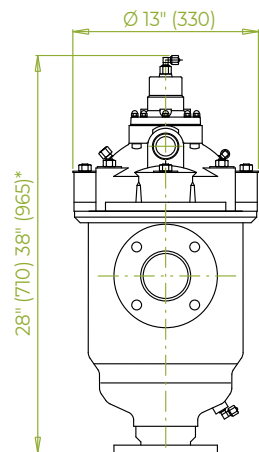

M104CL

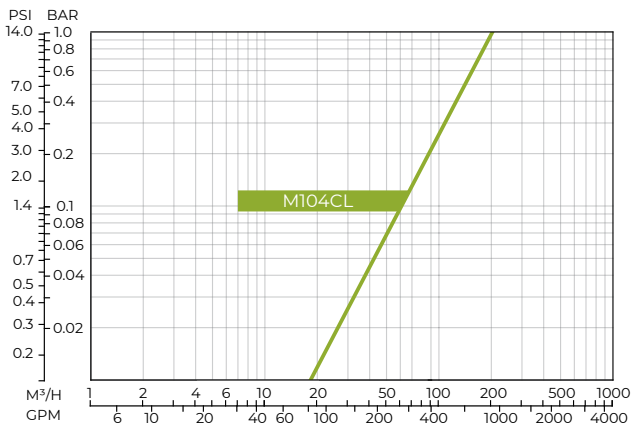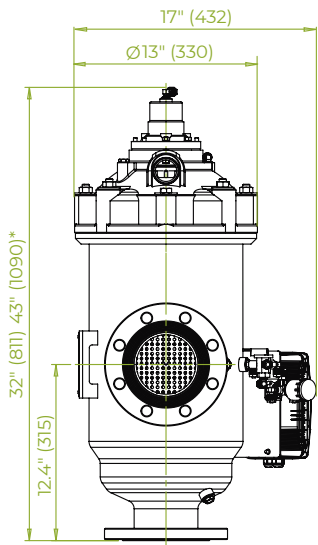

*Approx. length required for maintenance

Technical Specifications - M100 Models

Filter Model	M102C / M103C	M103CL / M104C	M104CL
General Data			
Maximum flow rate*	175 gpm (40 m³/h)	350 gpm (80 m³/h)	440 gpm (100 m³/h)
Inlet/Outlet diameter	2" (50 mm) 3" (80 mm)	3" (80 mm) 4" (100 mm)	4" (100 mm)
Standard filtration degrees	500, 300, 200, 130, 100, 80 micron		
Minimum working pressure	30 psi (2 bar) For lower pressure please consult Amiad		
Maximum working pressure	116 psi (8 bar)		
Maximum working temperature	131°F (55°C)		
Weight [empty]	2" 48.5 lb (22 kg) 3" 55 lb (25 kg)	3" 66 lb (30 kg) 4" 77 lb (35 kg)	4" 110 lb (50 kg)

* Consult Amiad for optimum flow depending on filtration degree and water quality.

Flushing Data			
Minimum flow for flushing (at 30 psi - 2 bar)	66 gpm (15 m³/h)	88 gpm (20 m³/h)	97 gpm (22 m³/h)
Reject water volume per flush cycle (at 30 psi - 2 bar)	4 gallon (15 liter)	5.2 gallon (20 liter)	7.3 gallon (28 liter)
Flushing cycle time	10 seconds		
Exhaust valve	1.5" (40 mm)		
Flushing criteria	Differential pressure of 7 psi (0.5 bar), time intervals or manual operation		

Screen Data			
Total filtration area	202 in² (1,300 cm²)	329 in² (2,120 cm²)	465 in² (3,000 cm²)
Net filtration area	116 in² (750 cm²)	232 in² (1,500 cm²)	349 in² (2,250 cm²)
Screen types	Molded weavewire stainless steel 316L		


Construction Materials	
Filter housing	Epoxy-coated carbon steel 37-2 (stainless steel 316L on request)
Filter lid	High density polypropylene, epoxy coated carbon steel 37-2 (stainless steel 316L on request)
Cleaning mechanism	PVC and stainless steel 316L
Exhaust valve	Brass, stainless steel 316L, BUNA-N
Seals	BUNA-N
Control	Brass, stainless steel 316L, and acetal

M100 Models


M104LPN / M106LP





Typical Dimensional Drawing
inch (mm)

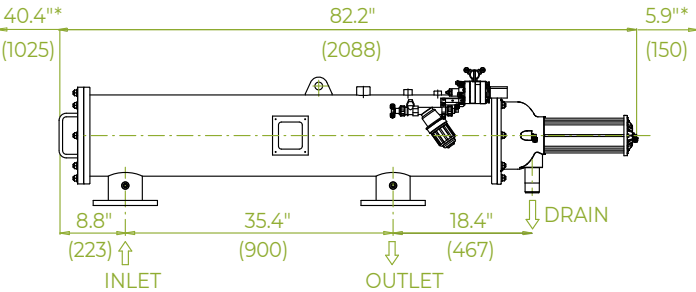

Head Loss Graph (in clean water)

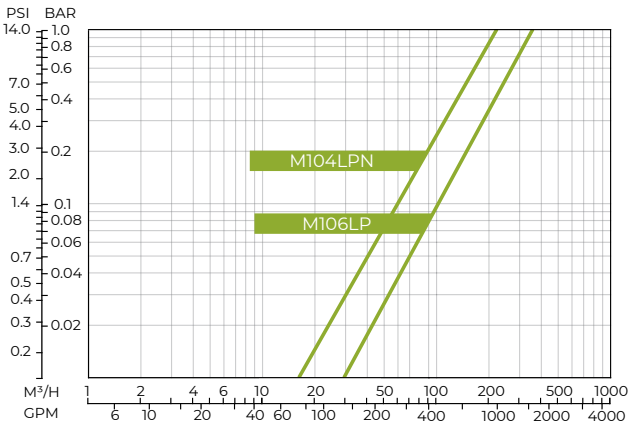

M104XLP / M106XLP / M108LP / M110P

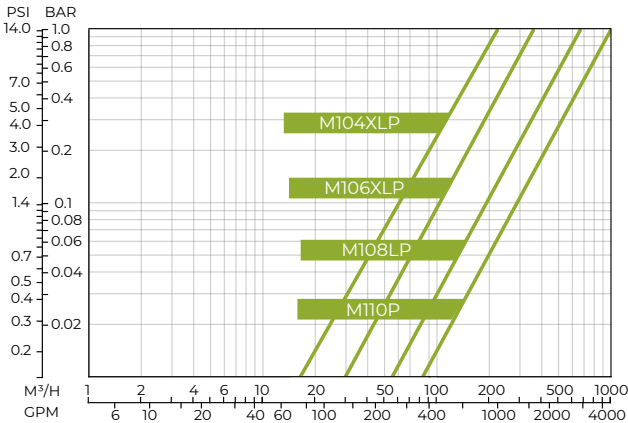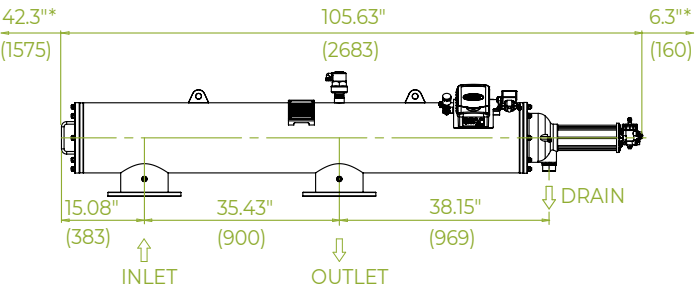

*Approx. length required for maintenance

Technical Specifications - M100 Models

Filter Model	M104LPN / M106LP	M104XLP / M106XLP / M108LP / M110P
General Data		
Maximum flow rate*	793 gpm (180 m³/h)	1,760 gpm (400 m³/h)
Inlet/Outlet diameter	4" (100 mm) 6" (150 mm)	4" (100 mm) 6" (150 mm) 8" (200 mm) 10" (250 mm)
Standard filtration degrees	500, 300, 200, 130, 100, 80 micron	
Minimum working pressure	30 psi (2 bar) For lower pressure please consult Amiad	
Maximum working pressure	150 psi (10 bar)	
Maximum working temperature	131°F (55°C)	
Weight [empty]	4" 198 lb (90 kg) 6" 253.5 lb (115 kg)	4" 242.5 lb (110 kg) 6" 264.5 lb (120 kg) 8" 308.6 lb (140 kg) 10" 348 lb (158 kg)

* Consult Amiad for optimum flow depending on filtration degree and water quality.

Flushing Data		
Minimum flow for flushing (at 30 psi - 2 bar)	114 gpm (26 m³/h)	132 gpm (30 m³/h)
Reject water volume per flush cycle (at 30 psi - 2 bar)	33 gallon (125 liter)	40 gallon (150 liter)
Flushing cycle time	15 seconds	
Exhaust valve	1.5" (40 mm)	
Flushing criteria	Differential pressure of 7 psi (0.5 bar), time intervals or manual operation	

Screen Data		
Total filtration area	953 in² (6,150 cm²)	1,378 in² (8,890 cm²)
Net filtration area	698 in² (4,500 cm²)	1,054 in² (6,800 cm²)
Screen types	Molded weavewire stainless steel 316L	


Construction Materials		
Filter housing	Epoxy-coated carbon steel 37-2 (stainless steel 316L on request)	
Filter lid	High density polypropylene, epoxy coated carbon steel 37-2 (stainless steel 316L on request)	
Cleaning mechanism	PVC and stainless steel 316L	
Exhaust valve	Brass, stainless steel 316L, BUNA-N	
Seals	BUNA-N	
Control	Brass, stainless steel 316L, and acetal	

MG Models


MG110




Typical Dimensional Drawing
inch (mm)

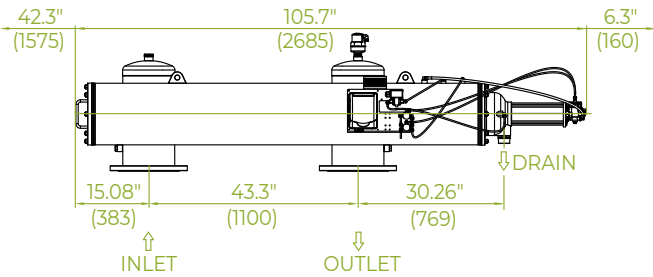

Head Loss Graph (in clean water)

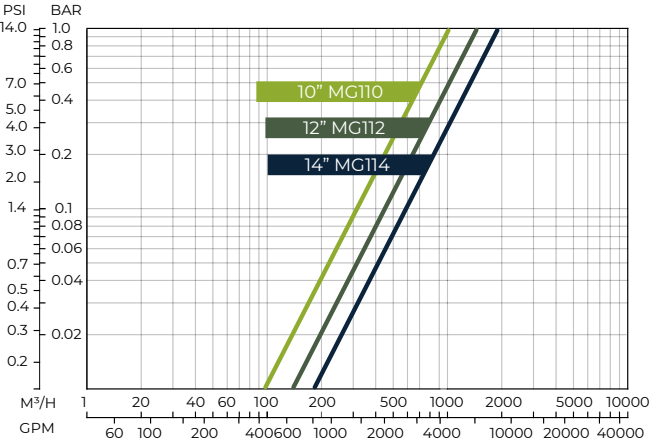

MG112

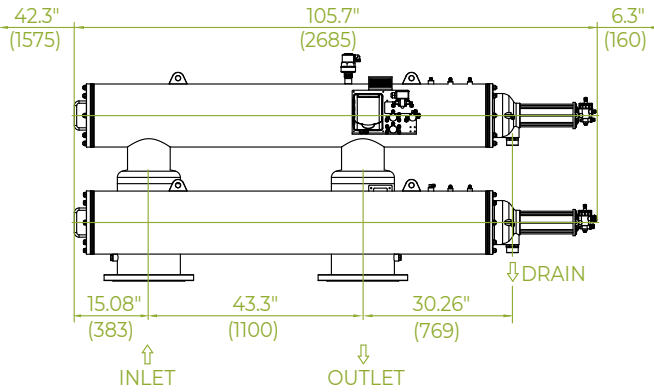


Technical Specifications - MG Models

Filter Model	MG110	MG112	MG114
General Data			
Maximum flow rate*	1,760 gpm (400 m³/h)	2,640 gpm (600 m³/h)	3,520 gpm (800 m³/h)
Inlet/Outlet diameter	10" (250 mm)	12" (300 mm)	14" (350 mm)
Standard filtration degrees	500, 300, 200, 130, 100, 80 micron		
Minimum working pressure	30 psi (2 bar) For lower pressure please consult Amiad		
Maximum working pressure	150 psi (10 bar)		
Maximum working temperature	131°F (55°C)		
Weight [empty]	717 lb (325 kg)	1,054 lb (480 kg)	1,590 lb (723 kg)

* Consult Amiad for optimum flow depending on filtration degree and water quality.

MG114

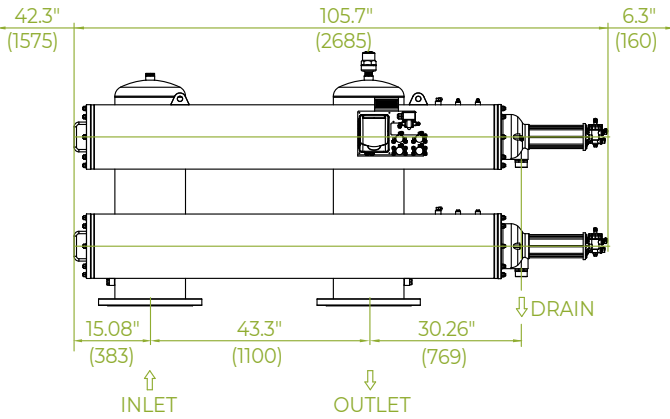

*Approx. length required for maintenance

Flushing Data			
Minimum flow for flushing (at 30 psi - 2 bar)	132 gpm (30 m³/h)		
Reject water volume per flush cycle (at 30 psi - 2 bar)	80 gallon (300 liter)	120 gallon (450 liter)	160 gallon (600 liter)
Flushing cycle time	30 seconds	45 seconds	60 seconds
Exhaust valve	1.5" (40mm)		
Flushing criteria	Differential pressure of 7 psi (0.5 bar), time intervals or manual operation		

Screen Data			
Total filtration area	2,756 in² (17,780 cm²)	4,134 in² (26,670 cm²)	5,512 in² (35,560 cm²)
Net filtration area	2,108 in² (13,600 cm²)	3,162 in² (20,400 cm²)	4,216 in² (27,200 cm²)
Screen types	Molded weavewire, stainless steel 316L		



Headquarters

Amiad Water Systems Ltd.

Web: www.amiad.com

E-mail: info@amiad.com

The Americas

USA

Amiad USA Inc.

Web: www.amiadusa.com | E-mail: infousa@amiad.com

Brazil

Amiad Sistemas de Água Ltda.

E-mail: infobrasil@amiad.com

Mexico

Amiad México SA DE CV,

Web: www.amiad.es | E-mail: infomexico@amiad.com

Irrigation office: E-mail: infomexico-irr@amiad.com

Asia

India

Amiad Filtration India Pvt Limited

Web: www.amiadindia.com | E-mail: info-india@amiad.com

China

Amiad China (Yixing Taixing Environtec Co., Ltd.)

Web: www.amiad.com.cn | E-mail: infochina@amiad.com

South-East Asia

Filtration & Control Systems Pte. Ltd.

E-mail: info-singapore@amiad.com

Australia

Amiad Australia Pty Ltd.

Web: www.amiad.com.au | E-mail: sales@amiad.com

Europe

Amiad Water Systems Europe SAS

E-mail: industry-europe@amiad.com

German branch office

E-mail: industry-de@amiad.com

United Kingdom

Amiad Water Systems UK Limited

E-mail: info-uk@amiad.com



 **amiad® IRRIGATION**

MASTERS OF FILTRATION

www.amiad.com

910101-000477/09.2019

Copyright © 2019 Amiad Water Systems Ltd. All rights reserved. The contents of this catalogue including without limitation all information and materials, images, illustrations, designs, icons, photographs, graphical presentations, designs, literary works, data, drawings, slogans, phrases, names, trademarks, titles and any other such materials that appear in this catalogue (collectively, the "Contents") are the sole property of Amiad Water Systems Ltd. ("Amiad"). Amiad has sole and exclusive right, title and interest in the Contents, including any intellectual property rights, whether registered or not, and all know-how contained or embodied therein. You may not reproduce, publish, transmit, distribute, display, modify, create derivative works from, sell or participate in any sale of, or exploit in any way, in whole or in part, any of the Contents or the catalogue. Any use of the catalogue or the Contents, other than for personal use, requires the advanced written permission of Amiad.

The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Amiad Water Systems is under license. Other trademarks and trade names are those of their respective owners.