

SUBMERSIBLE TURBINE



HydrofloPumps
Fluid Solutions™
A Taco Group Company

WWW.HYDROFLOPUMPS.COM

HIGH EFFICIENCY SUBMERSIBLE TURBINE

Engineered to meet your needs.


Flows: 50 gpm - 15,000 gpm
Total Dynamic Head: 0 - 1,800 feet
Settings: Shallow sumps to 1,700 feet
Inline and horizontal boosters

Hydroflo Pumps
Fluid Solutions™
A Taco Group Company

The first with these features:

- Standard Stainless Steel Investment Cast Impellers
- 5"- 7" All Ductile Iron Bowl Castings Standard
- Standard all Stainless Steel Bolting & Collets
- Standard Hydroflo Flow Engineered Polymer **FEP** bearings

Zero Lead Pumps®

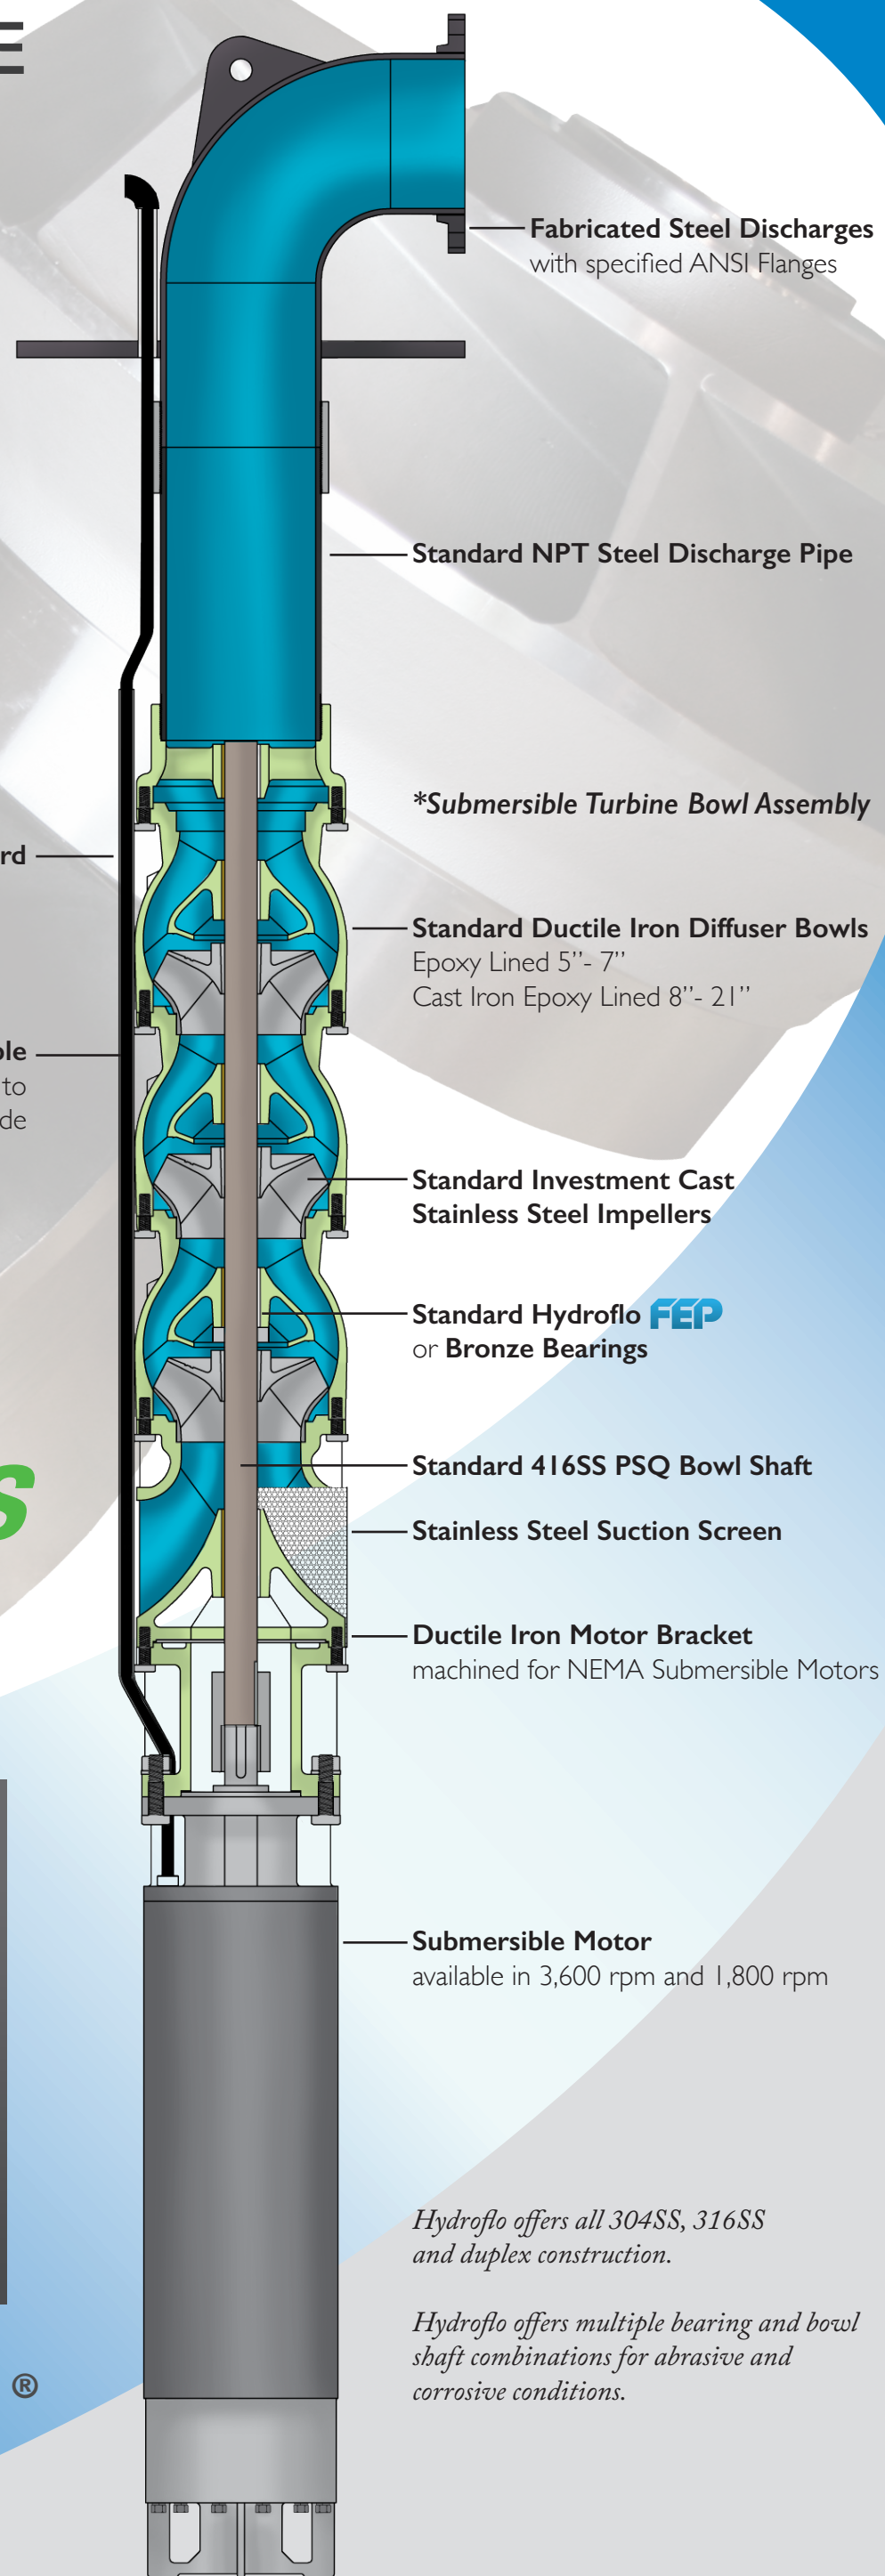

*Hydroflo offers all 304SS, 316SS
and duplex construction.*

*Hydroflo offers multiple bearing and bowl
shaft combinations for abrasive and
corrosive conditions.*

WWW. HYDROFLOPUMPS.COM

7118 LOBLOLLY PINE BLVD.
FAIRVIEW, TN 37062
PHONE: 615.799.9662
FAX: 615.799.5654

13265 S.R. 17
CULVER, IN 46511
PHONE: 615.799.9662
FAX: 615.799.5654

1886 DAVID BAILEY ROAD
BROWNFIELD, TX 79316
PHONE: 806.637.8961
FAX: 806.637.8964

5437 S. NIKITA AVENUE
FRESNO, CA 93725
PHONE: 559.834.1945
FAX: 559.834.9705

HydrofloPumps
Fluid Solutions™
A Taco Group Company

2498 KUHN RD
MARION, AR 72364
PHONE: 870.735.0400
FAX: 870.733.0500