




FLOATS

PRODUCTS / PUMP CONTROLLERS & SWITCHES

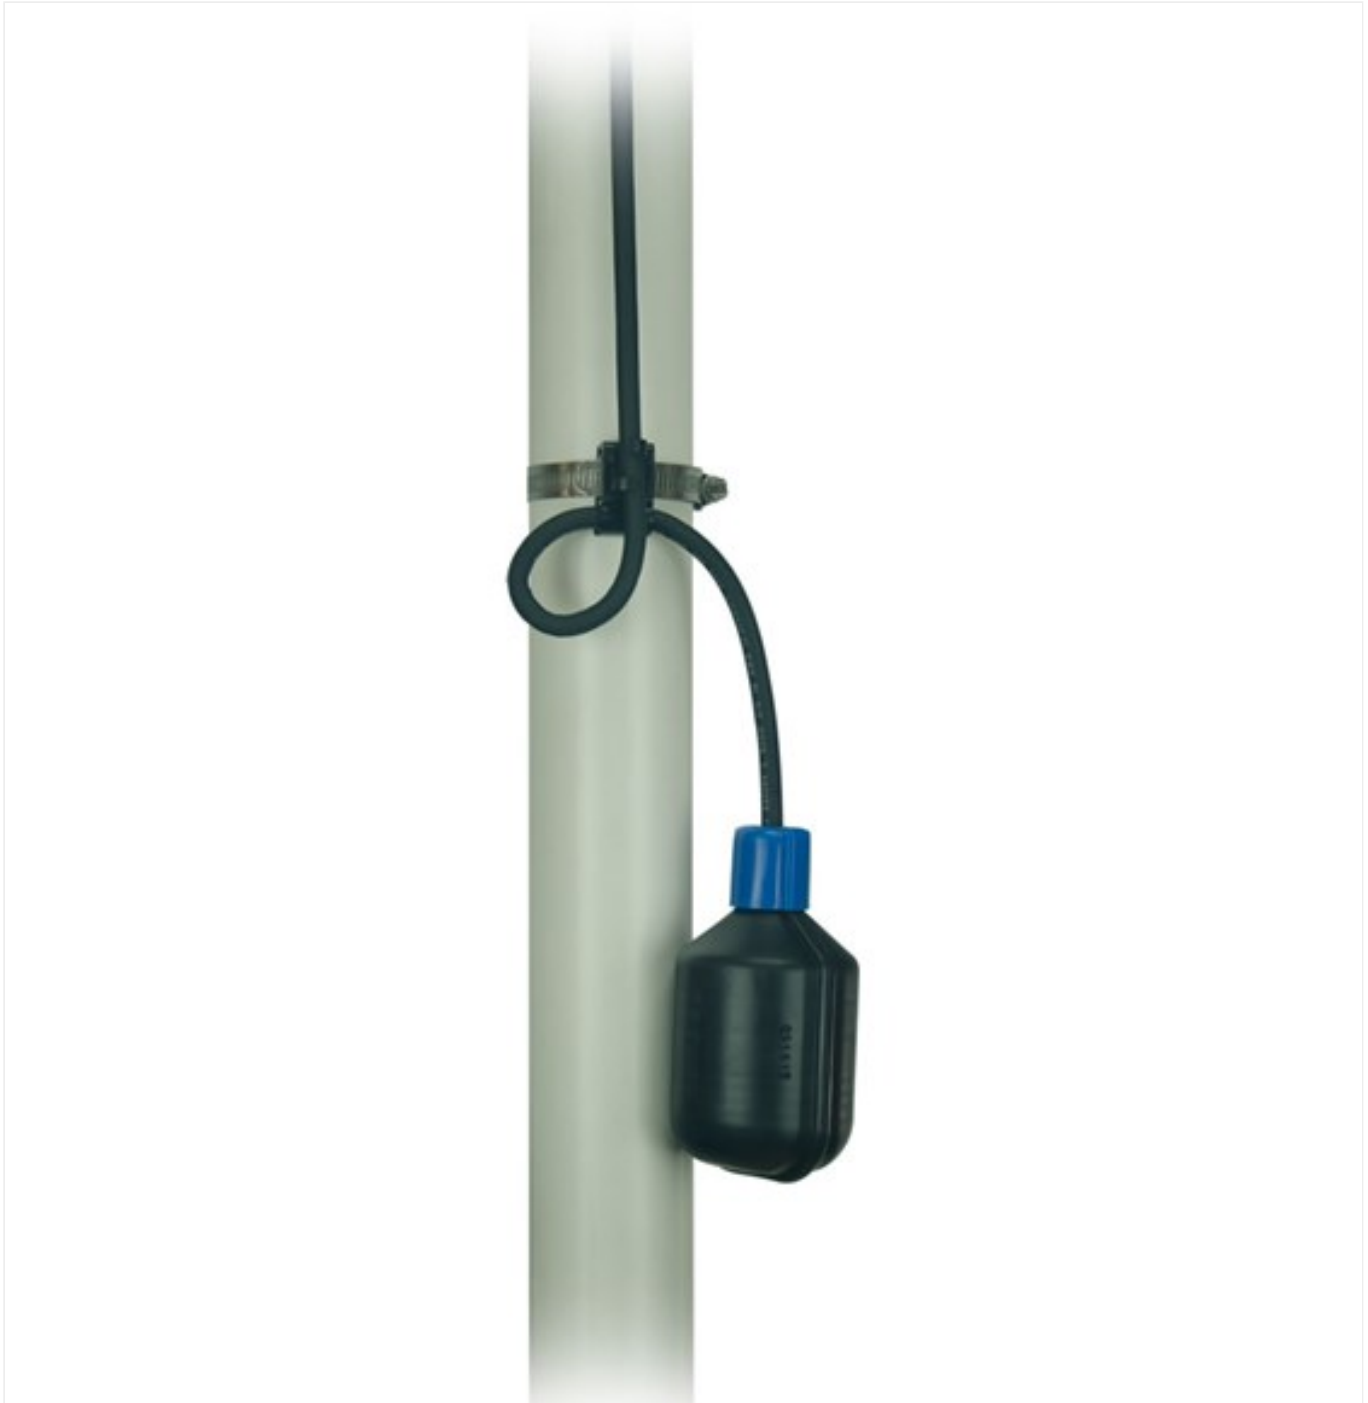

GET IN TOUCH: 877.428.3901



Control Switches

REQUEST A QUOTE

Normally Open Narrow Angle Float	
95-08	Rated for 5 amps @ 125V or 250V, 20' Cord
95-25	Rated for 5 amps @ 125V or 250V, 30' Cord
95-26	Rated for 5 amps @ 125V or 250V, 50' Cord
95-27	Rated for 5 amps @ 125V or 250V, 100' Cord

Normally Open Low Voltage Narrow Angle Float	
95-43	Low voltage rated for 0.160-100mA @ 5V-125V, 20' Cord
95-44	Low voltage rated for 0.160-100mA @ 5V-125V, 30' Cord
95-45	Low voltage rated for 0.160-100mA @ 5V-125V, 50' Cord
95-46	Low voltage rated for 0.160-100mA @ 5V-125V, 100' Cord

Normally Closed Low Voltage Narrow Angle Float	
95-48	Low voltage normally closed rated for 0.160-100mA @ 5V-125V, 20' cord

Normally Open Wide Angle Float	
95-09	Rated for 5 amps @ 125V or 250V, 20' cord

GET IN TOUCH: 877.428.3901



Normally Open Wide Angle Piggyback Float	
95-28	Rated for 13 amps @ 120V, 20' cord and piggyback plug

Normally Open Wide Angle Dual Float	
95-24	Rated for 13 amps @ 120V or 240V, 20' cord
95-55	Rated for 13 amps @ 120V, 20' cord and piggyback plug

Specifications

- UL listed for water and sewage
- Floats are constructed of durable PVC/polypropylene
- Simple installation
- Includes mounting hardware
- Designed for effluent, sewage and dewatering applications

Inc.

22220 Opportunity Way Suite 101, Riverside CA, 92518
 Phone: 951.487.8073



NEWSLETTER SIGN UP

Name
Company
Email

GET IN TOUCH: 877.428.3901



Sign Up

©2020 See Water Inc. - All Rights Reserved.

Website by Steps Marketing

GET IN TOUCH: 877.428.3901